

FIGURE 13 — Model SP13.5TRBXWK

SPECIFICATIONS

Frequency Response:

DC to middle of Channel 5
± 3 inches (See Figure 39.)

NRA Sensitivity Rating:

98.6°

Free-Space Cone Resonance:

Huh?

Power Handling Capacity:

110-220 V 25 cycle ac-dc 3 phase

Critical Damping Factor,

In an infinite Baffle:

.001

In recommended orange crate:

WOW!

Distortion:

Don't mention that word

Magnet Weight:

3 tons

Size:

5 feet 4 inches wide

17 feet narrow

13-1/16 inches high

\$7 short

Mounting:

13 miscellaneous size holes randomly
spaced at uneven intervals in a
haphazard way

Net Weight:

73 tons

Shipping Weight:

68 tons

Price:

\$7,907* Audiopill Net, F.O.B. your
nearest tar pit. Comes completely
unassembled in three box cars.

DESCRIPTION

Unequivocally, undeniably, doubtlessly,
without question and really this is the
most amazing, remarkable, revolu-
tionary, sensational new development
ever revealed, ever, honest! When
you see this new terrific unit you won't
be able to contain yourself! WOW!
Silky highs — woolen lows! Complete
with new vital "presence" and
"absence" controls! Your friends will
scream with envy when they hear this
new speaker! Amazing new exclusive
3-way, 12-D, binaural relief port
eliminates spurious propagation of
intermediate, and undesirable biped,
tertiary grid-leaks! No messy floors to
mop! WOW! This new reproducer
incorporates a new, ridiculously simple
principle which our engineers can't
explain yet! 13 extra octaves of added
bass when the unit is coupled to a bowl
of oatmeal. Think of that—just think of
that! WOW! Complete, self-contained
including new "wow" filter; nothing
else to buy! (See page 2 for accessories.)
Comes with new 5 inch cable and new
genuine combination "Good-luck"
charm and stylus pressure gaugel

Electro-Voice®
a gulton company

Model SP13.5TRBXWK Rearaxial Softspeaker

INSTALLATION

If you are left handed, start with step
"f" and reverse procedure.

- Connect the 300-ohm twin-lead from the UHF Antenna to the terminals marked VHF ANT on the rear of the chassis.
- Connect a short length of 300-ohm twin-lead between the terminals marked UHF REC on the rear of the front chassis and the UHF antenna terminals marked AFC on the front of the rear chassis.
- Connect the 300-ohm lead from the UHF antenna to the terminals marked WOW ANT on the side of the front chassis.
- Connect a short length of 300-ohm twin-lead between the terminals marked VHF REC on the front of the side chassis.
- Connect a short length of 300-ohm twin-lead between the terminals marked TV REC on the side of the rear chassis and the UHF antenna terminals marked REC ANT on the receiver chassis.
- Connect the VHF antenna to the terminals marked FM ANT on the rear of the rear chassis.

Mr. Fafnir N., Horse Cave, Ky.
"Send me another — my canaries
love it — it's for the birds!"
Miss Brunhilde S., Horse Cave, Ky.
"This thing scares me!"

Mr. Clyde T., Horse Cave, Ky.
"I'd send it back, but the post-
master won't touch it."
Mr. Wong Wong Ago, Horse Cave, Ky.
"此物吓死我了!"

FIGURE 5 — Actual Testimonials from Satisfactory Customers

*Zone 2 includes: West Texas

NOTE: If a short length of 300-ohm twin-lead is not available, use two short lengths of 150-ohm twin-lead, or cut a long length of 600-ohm twin-lead in half. If more than one UHF station is to be received, the automatic on-off switch may still be used as outlined above under Automatic "Operation." If this feature is not desired the front panel on-off switch may be used and the ac receptacle on the rear chassis disregarded; in this case, disconnect a short length of 300-ohm twin-lead.

When connecting interconnected connectors, take care to connect the connected connecting connectors to the unconnected connections, interconnecting the disconnected connectors with a short length of 300-ohm twin-lead. Otherwise construmulation of the transmogni-factor will cause interpolation of the controcacoustic control. WOW!

CAUTION NOTES

1. Do not operate this speaker within 200 feet of Aardvarks and 3-toed Sloths as this thing will cause untold agony and immediate disintegration to the aforementioned above.
 2. It is imperative that all inputs and outputs are grounded so that output is reduced to the doorstep of pain when used indoors.
 3. Close cover before striking.
- N.B. Unless instructions are carefully followed with utmost caution and circumspection, shock waves and turbulent buffeting may be experienced and the darn thing won't work.

ACCESSORIES

Model BRAK-1. 75-ton derrick. Dainty and inconspicuous for quick, easy mobility when moving unit for dusting, relocating, mobile operation. Audiopill Net (with steam engine). \$7,907

Model BRAAK-1. Furnishing kit. For interior of packing crate. Use this handy little accessory to convert the SP13.5TRBXWK packing crate to an additional room for your home. Comes in Battered Blonde, Weather-beaten Mahogany, and Box Car Red. Audiopill Net \$790.70

Model BRAAAK-1. Birdcall adapter. Special sonic generator either attracts or repels birds of all types. Complete with 1,239 position bird selector switch and 7 x 50 coated binoculars for watching birds come and go. Please specify birds desired. Audiopill Net \$79.07


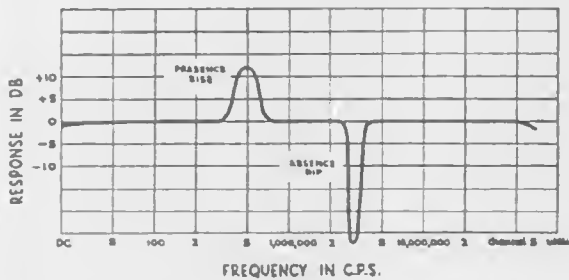


FIGURE 3 — Frequency Response at 791-watt Level

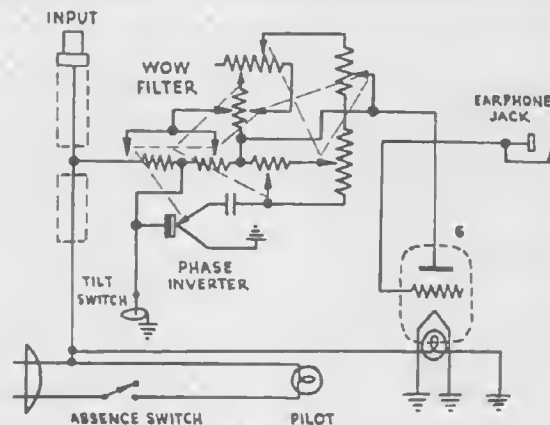

Schematic Diagram

ELECTRO-VOICE LTD./Largest makers of ear trumpets and stuff in the country.
 Electro-Voice, Ltd. 7 North Southwestern Ave., East Westerly, South Dakota
 Plants located in Horse Cave, Ky., and Kinnikinnick, Connecticut
 Shopping for Real Estate in Horse Cave, Calif.
 Cable Address: Madglockenschpielermitgongennoisenlab